

Study of workers' exposures to vibrations produced by portable shakers¹

Pascuzzi S., Santoro F., Panaro V.N.

University of Bari – PRO.GE.SA. Mechanics Section

Via Amendola 165/A - 70126 Bari ITALY,

Tel. +39 080 544 2214, Fax +39 080 544 2214

simone.pascuzzi@agr.uniba.it, f.santoro@agr.uniba.it, vittorio.panaro@agr.uniba.it

Abstract

Herein note focussed the attention on the vibration levels issued by two portable shakers models build in different and subsequent times by the same building company, which present different design and constructive solutions for both the handles.

The two tools were used, during tests, by a single operator, expert in the use of this typology of tools due to his job activity during the olives harvesting campaigns; the measurements were carried out respecting the indications contained in the provisions UNI EN ISO 5349.

A different dynamic behaviour of the two tools emerged from the tests. Has been highlighted, also, the importance of the evaluation of the vibrations produced by portable shakers with the purposes to carry out studies that aim to the research of technical solutions which allow the reduction of vibrations transmission through the handles and through the shoulder support device of the tool.

Keywords: olive harvesting, safety, transmitted vibration.

Introduction

The exposure of human body to mechanical vibrations can, as it is well known, be source of pathologies of different nature and entity, even if the levels (intensity, spectrum content, daily and total exposition duration) which determine the above-mentioned injures are not exactly known (ENAMA 2005, ISPESL 2001, UNI 1999).

The whole problems connected to the transmission of the vibrations to man can be divided according to two essential typologies: - vibrations of the whole body; - vibrations of the hand-arm system, meaning, with the first, a stress of oscillatory nature which involves the whole human organism; with the second, instead, a mechanical stimulation, also of oscillatory origin, which propagates through the hands and the arms and that gradually decrease.

The transmission of the vibrations through the hand-arm system is consequent to the use of tools equipped with handles through which the operator makes the job; it is a rather complex phenomenon because involves other factors which interact with the intensity of the vibration and its way of introduction and propagation in the organism (UNI 2004). Has to be remembered that, in most cases, the handles represent the support device of such tools which are equipped with an internal combustion or electric engine that transmits the motion to the working utensil (Monarca *et al.*, 2003).

Through the handles the operator reacts to strengths and moments which spring between utensil and piece during the manufacturing. At least, the entity of the vibrations transmitted through the hand-arm system and the consequent effects are affected strongly by the

¹ Research developed within the 2005 MIUR project (2005070324) "Methods of planning and systemic-integrated verification of the safety of work, food and environment in the agroindustrial sector - ISPROject (Integrated Safety Project)", Principal Investigator Prof. G.Zoppello.

Each of the authors contributed in equal parts to this work.

prehensile and/or pressing strength of the operator which, obviously, changes in function of the hands and wrists position during the manufacturing, in function of the finish level requested by the manufacturing itself and in function of the simultaneous use of the two hands.

Herein note focussed the attention on the vibration levels issued by the portable shakers which are always more used in the Apulia region olives production for the harvesting operations of the olives by the trees first of all for the greater investment and exercise economy with respect to the traditional taken or self-moved shakers.

In particular, the results of the tests on two portable shakers models build in different and subsequent times by the same building company, which presents different design and constructive solutions for both the handles are reported.

Materials and Methods

The experimental tests have been carried out in an olives tree field located nearby the Agricultural Research Council (CRA-ISMA) in Monterotondo (Rome) and have been made on two brand new and actually produced models of portable shakers, both equipped with an internal combustion engine produced by TEKNA s.r.l. in Ostuni (BR): Vibrotek TK 650 e Vibrotek TK 5000 (Table 1).

Table 1. Technical characteristics of the tested portable shakers

Model	Engine	Fuel tank capacity l	Vibration system	Reduction	Rod stroke mm	Frequency vibration stroke/min	Weight machine kg
Vibrotek TK 650	52 cc single-cylinder 2 stroke engine	1,7	Cam-rod system	Helical gears	60	till 1900	14,4
Vibrotek TK 5000					50		11

The choice fell on these models because, even though they are constructively similar, they present a substantial diversity in the arrangement and structuring of the handles.

In the Vibrotek TK 650 model, the command handle is mounted on an articulate quadrilateral support, in which torsion spring connected to the extremities to the two connecting rods, reacting to the vibrating stress recalls the system in the initial position. Instead, the auxiliary handle, runs, winning the recall spring's reaction, on a metal board mounted in the same direction of the vibrating rod (Fig. 1).

In the Vibrotek TK 5000 model both the handles are mounted on the same axis which is itself connected to the tool by an articulate parallelogram system, with the recall springs located in the anchoring points of the axis with the two connecting rods (Fig. 2).

Besides, both the tools, presents, downstream of the flywheel, a centrifugal clutch which, at the minimum regime, does not transmit the motion to the conic couple connected to the rod-lever mechanism which produces the alternative motion of the working rod.

The two machinery were used, during tests, by a single operator, expert in the use of this typology of tools due to his job activity during the olives harvesting campaigns.

The measurements were carried out respecting the indications contained in the provisions UNI EN ISO 5349 equipping both the shakes with two aluminium rods of different length: 325 cm (long rod); 225 cm (short rod).



Figure 1. Vibrotek TK 650: a – control hand-grip (1 – connecting rod, 2 – spiral spring); b – auxiliary hand-grip



Figure 2. Vibrotek TK 5000: 1 – connecting rod, 2 – spiral spring, 3 – control hand-grip, 4 – auxiliary hand-grip

The instruments and tools used were:

- Brüel & Kjær 4326 tri-axial accelerometer, with $0,320 \text{ mV}/(\text{m}/\text{s}^2)$ sensitivity; 10 g mass; frequency response from 0,1 Hz to 13,3 kHz for x axis, from 0,1 Hz to 10 kHz for y axis and from 0,1 Hz to 16,6 kHz for z axis (linear response with a precision <10%);
- PCB SEN020 tri-axial accelerometer, with $0,100 \text{ mV}/(\text{m}/\text{s}^2)$ sensitivity; 10 g mass; frequency response between 0,5Hz and 5 kHz, resonance frequency >25 kHz;
- Brüel & Kjær 2647 converter, used only for the B&K tri-axial accelerometer, used to convert the charge signals into continuous electrical signals;
- "SoundBook" data acquisition system made by a PC and a multi-analysis real-time interface (8 measurements channels);
- SoundBook™ "SAMURAI" operating system, used to configure acquisition system, to real-time monitor the measurements and to elaborate and present the obtained data;
- PCB 394C06 calibrator, characterized by a test signal of $9,835 \text{ m}/\text{s}^2$ (RMS), at the frequency of 159,2 Hz;
- aluminium supports, having 12 g of mass, used to fix the accelerometers to the handles of the shakers; these supports have been fixed with two plastic strip in order to ensure a perfect connection between accelerometers and tested machinery.

Particular attention was used during the fixing process of the accelerometers on the auxiliary and command handles, in order to have each axis oriented in the directions imposed by the provisions UNI EN ISO 5349-1 (basicentric coordinate system): y_h axis parallel to the axis of the handle; x_h perpendicular to the axis of the handle oriented by the back towards the palm of the hand and, at last, the z_h axis perpendicular to the plan formed by the two previous axis (Fig. 3)

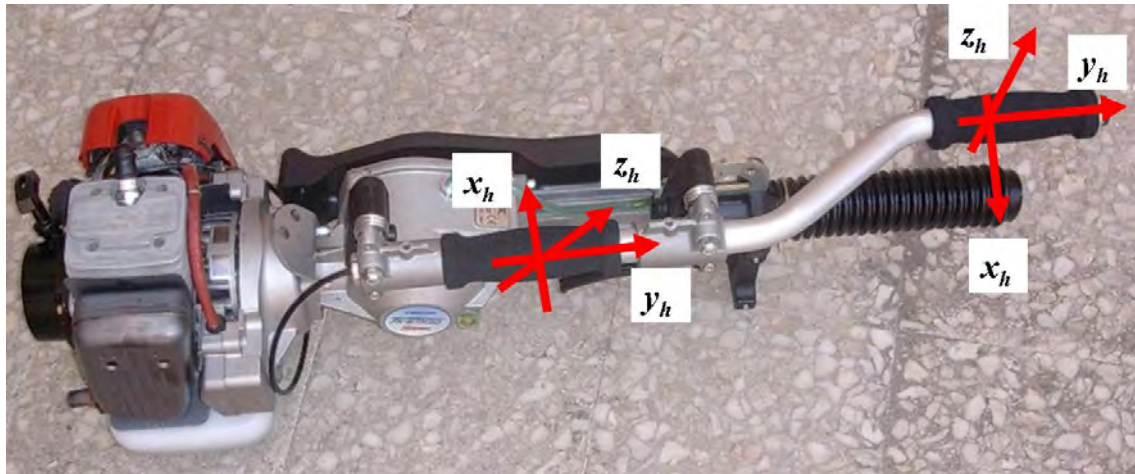


Figure 3. Basicentric coordinate system adopted for measurements

The measure was set up using the optional software SoundBook HVMA which having, so, a class 1 testing instrument for the measure of the human exposure to the vibrations in conformity to the ISO 8041-1990 and ISO/DIS 8041-2003 and with digital direct weighing filters on the incoming signal. The analysed frequency spectrum, correspondingly to the actual provisions related to the hand-arm vibrations, was considered between 6,3Hz and 1250 Hz.

The equivalent accelerations weighed up in frequency on the single axis (a_{wx}, a_{wy}, a_{wz}) and total (a_{hv}), acquired simultaneously, were measured for the following modes of working of the tested shakers:

- at the minimum engine regime, that's to say ~2100 rpm (*idle speed*) with a measurement time of 20 s;
- during shaking work (*full load*) with a measurement time of 300 s;
- at the maximum engine regime, that's to say ~9000 rpm (*top speed*) with a measurement time of 4 s.

The measurements at *idle speed* (working rod stopped) and at *top speed* have been carried out with measurement times of 20 s e 4 s respectively, holding the shakers with both hands in a normal working position (working rod at $\sim 60^\circ$ on the horizontal plane); these tests were carried out only on the shakers with the long working rod mounted.

The *full load* working mode was made of several working phases: a) "hooking" of the branch with the engine to the minimum regime; b) operation of the accelerator, in order to open to the maximum value the valve of the carburettor; c) shaking of the branch exercising a constant strength on the handles; d) release of the accelerator, in order to take back the engine to the minimum regime; e) "unhooking" of the branch. The *full load* measurements were carried out with the shakers equipped with long working rod (*full load -- long rod*) and with the short one (*full load – short rod*)

The tests in each operating condition were repeated five times.

To monitor the data during the tests has been set up the real-time visualization of frequency analysis of the two accelerometers, of global value of the spectrum (axis x,y,z) and of a video capture using a web cam (Fig.4).

Before each test series and at the end of the series a calibration of the measurements instruments was carried out.



Figure 4. Signal analyses coming from the accelerometers displayed in real time

Results and discussion

In the Tables 2 and 3, have been represented, respectively for the Vibrotek TK 650 and for the Vibrotek TK 5000, the frequency weighted accelerations along the axis and the total accelerations a_{hv} . The values a_{wx} , a_{wy} and a_{wz} are obtained, the prevision contained in UNI EN ISO 5349, as arithmetical average of the ones measured on the same axis (x , y and z) during the five repetitions made for each working mode of the shakers (*idle speed*, *top speed*, *full load - long rod*, *full load - short rod*); the total equivalent accelerations were calculated, how the same rule states vectorially adding the mean values concerning the three cartesian axis.

The most significant values are obviously the ones measured during the harvesting tests (*full load*), as they represent the real use of the shakers; in these condition of usage the "intrinsic" characteristics of each shaker (rigidity, mass, rotating inertia of the individuals component and total), that define in an univocal way the natural frequencies and the ways of vibrating of the shaker, modify themselves at the moment in which the hook of the rod hooks the branch. This last one presents its intrinsic characteristics (rigidities, mass, etc.), moreover very much variables in function of its dimensions (length, diameter, etc.), that interacts with those of the shaker originating a quivering system, established by the branch-shaker system, of which it is difficult to foresee the dynamic behaviour. In this regard, it's useful to observe that the total weighted acceleration a_{hv} , and the corresponding vibration emission, concerning

the *top speed* mode, dependent just from the characteristics of the shaker, is different from that *full load* mode related, instead, to the characteristics of the branch-shaker system.

Table 2. Vibrotek TK 650. Average values of the frequency-weighted vibrations (values in m/s^2)

hand - grip	Test condition	a_{wx}		a_{wy}		a_{wz}		a_{hv}	
		average	St.dev	average	St.dev	average	St.dev	average	St.dev
control	<i>idle speed</i>	2,0	0,20	1,5	0,23	2,4	0,11	3,5	0,20
	<i>top speed</i>	12,9	1,2	14,1	3,2	19,2	2,20	27,2	2,7
	<i>full load - long rod</i>	9,7	1,1	10,4	0,9	4,0	0,4	19,5	2,0
	<i>full load -short rod</i>	10,6	0,9	14,5	1,6	3,1	0,4	18,2	1,9
auxiliary	<i>idle speed</i>	4,1	0,48	0,6	0,05	3,6	0,5	5,5	0,3
	<i>top speed</i>	15,2	3,6	27,5	9,1	17,42	3,16	36,1	9,6
	<i>full load-long rod</i>	12,2	1,4	11,8	2,0	11,3	1,8	20,4	2,5
	<i>full load-short rod</i>	13,3	1,7	12,4	1,8	14,5	2,1	23,2	3,0

For the Vibrotek TK 650 shaker, the usage of the long working rod or of the short working rod produce on both the handles weighted total acceleration values a_{hv} of the same magnitude (average $20,3 m/s^2$). This tendency is the same for the x and y axis, while, on the z axis, the accelerations on the command handle are very much smaller (average $3,5 m/s^2$); this behaviour is probably due to the constructive characteristics of this handle which evidently is more rigid in the z direction.

Table 3. Vibrotek TK 5000. Average values of the frequency-weighted vibrations (values in m/s^2)

hand - grip	Test condition	a_{wx}		a_{wy}		a_{wz}		a_{hv}	
		average	St.dev	average	St.dev	average	St.dev	average	St.dev
control	<i>idle speed</i>	4,5	0,1	1,3	0,1	3,3	0,1	5,7	0,1
	<i>top speed</i>	9,3	1,1	9,4	0,6	7,7	0,6	15,3	1,2
	<i>full load - long rod</i>	8,4	1,0	7,6	1,2	8,3	1,2	13,1	2,0
	<i>full load -short rod</i>	8,5	1,1	9,2	1,5	9,0	1,3	15,4	2,1
auxiliary	<i>idle speed</i>	6,8	1,0	0,9	0,1	2,6	1,2	7,4	1,4
	<i>top speed</i>	5,9	0,8	12,1	0,8	17,0	1,1	21,7	1,4
	<i>full load - long rod</i>	16,1	1,9	6,3	1,2	12,4	2,0	21,3	2,7
	<i>full load -short rod</i>	6,5	1,1	1,7	0,9	9,6	2,0	11,7	2,2

With regards to the Vibrotek TK 5000 shaker, the assembly of the two handles on a single axis, integral part of an articulate parallelogram system, has modified the dynamic behaviour of the shaker itself with respect to the other tested shaker. On the command handle the total weighed acceleration a_{hv} is reduced of 33% with the long working rod and of 15% with the short working rod with respect to the same value measured for the Vibrotek TK 650 shaker; on the auxiliary handle, considering the working condition with the short working rod, the a_{hv} value is reduced of 50%. On this handle, besides, the acceleration values are comparable between the two shakers only when they are both equipped with the long working rod.

In the Figures 5 and 6, are represented in the shape of bar diagrams, the frequency analyses for 1/3 octave bandwidth of the vibrations measured, respectively on the Vibrotek TK 650 and the Vibrotek TK 5000 shaker, during the mode *full load -- long rod*. These figures were obtained considering the vectorial sum of the linear accelerations measured on

the three axes. From these figures the different dynamic behaviour of the two tools emerges in a clear way and, above all it is possible to notice the values meanly smaller of the accelerations measured on both the handles of the Vibrotek TK 5000 shaker. As we are dealing with the *full load* working mode, the regime of the engine is changed in a continuative way between 2100 and 9000 rpm, exciting the vibrating system in the correspondent range between 35 Hz and 150 Hz; to that has to be added the pulsating strength connected to the alternative movement of the working rod.

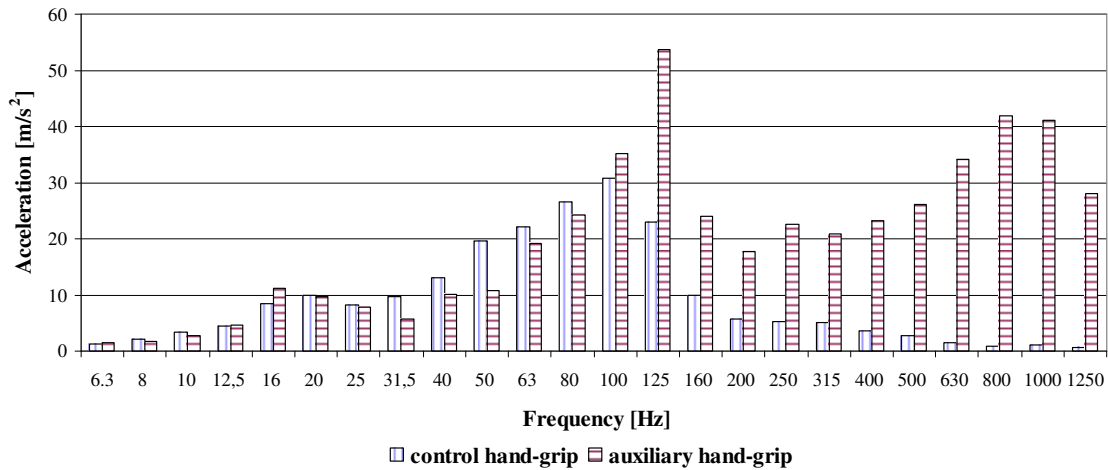


Figure 5. Vibrotek TK 650 equipped with long working rod. Average frequency spectrum of vibrations

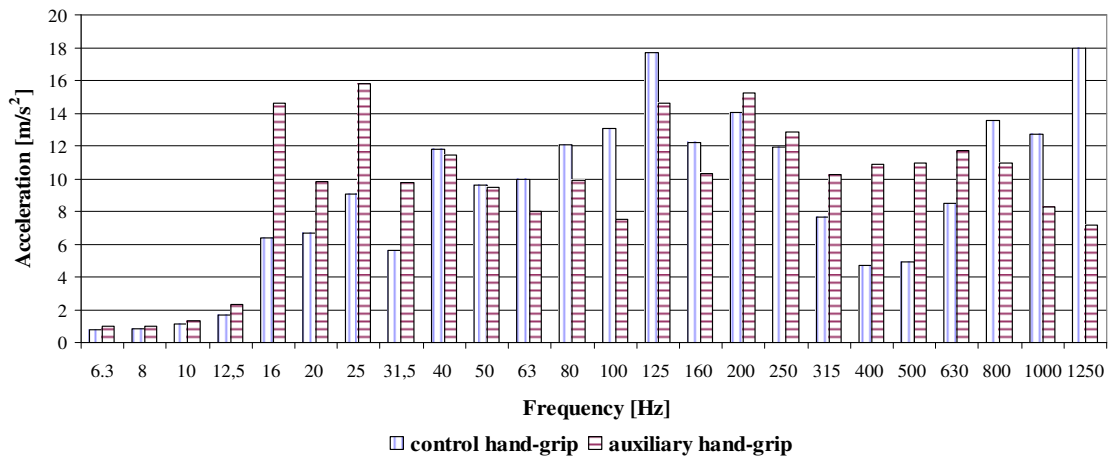


Figure 6. Vibrotek TK 5000 equipped with long working rod. Average frequency spectrum of vibrations

Conclusions

The results of the carried out tests, point out, in a particular way, the importance of the evaluation of the vibrations produced by portable shakers with the purposes to carry out studies that aim to the research of technical solutions which allow the reduction of vibrations transmission through the handles and through the shoulder support device of the tool.

Moreover is important to pay attention also to the weight of the tools so that can be avoided heavy physiological and muscular efforts.

The different dynamic behaviour of two devices which are structurally different only in the typology and disposition of the handles emerged from the tests; in purpose it is useful to remember that the limitation of the vibrations in design phase is one of the indication suggested by the current technical provisions [UNI 2007] to the tools manufacturers in order to increase the safety levels of the workers; in design phase, in fact, the in-depth study of some technical aspects allows an effective reduction of the effects of the exposure to damaging vibrations.

Acknowledgements

The authors wish to acknowledge the TEKNA firm for its active interest for this research. We are grateful to Gennaro Vassalini of the CRA-ISMA of Monterotondo for his help while conducting the tests. Special thanks to M. Gelao and C. Gidiuli of the PRO.GE.SA. Department for the availability and commitment showed in conducting the tests.

References

ENAMA 2005. Produzione documentale tecnica sulla problematica delle vibrazioni connessa all'uso delle macchine agricole (Documentary production about vibration problems connected to the use of agricultural machines).

ISPESL 2001. Linee Guida per la valutazione del rischio da vibrazioni negli ambienti di lavoro (Guidelines for the evaluation of vibration hazards at the workplace). Dipartimento Documentazione Informazione e Formazione, Roma.

MONARCA D., CECCHINI M., VASSALINI G. 2003. Hand-transmitted vibrations: reference standards for chainsaws. *Rivista di Ingegneria Agraria*,1,45-52.

MONARCA D., CECCHINI M., VASSALINI G. 2003. Vibrations transmitted to and-arm by the main chainsaws models sold in the Italian market. *Rivista di Ingegneria Agraria*,1,53-64.

UNI 2004. UNI EN ISO 5949-1. Measurement and evaluation of human exposure to hand-transmitted vibration. Part 1: General requirements.

UNI 2004. UNI EN ISO 5949-2. Measurement and evaluation of human exposure to hand-transmitted vibration. Part 2: Practical guidance to measurement at the workplace.

UNI 1999. UNI EN 12096. Declaration and verification of vibration emission values.

UNI 2007. UNI/TR 11232-1. Guidelines for vibration hazards reduction. Part 1: Engineering methods by design of machinery.